

Common flags

functional flagstones with a dimpled or smooth finish

DEPTHS



35 | 50
Millimetres

FINISH




Dim



Sm



450 x
450mm



600 x
600mm



900 x
600mm

Common flags
Technical Information



Frost
Resistant




Pedestrian
Use

STANDARDS + PERFORMANCE


Product Type	Functional flagstones with a dimpled or smooth finish
Manufactured to	hEN 1339:2003
Bending Strength	>3.5Mpa. This pressure applies to all sizes and depths.
Installed to	BS 7533-4:2006
NBS Plus	Q25 315

EDGES

Common flags 35mm units supplied with a chamfer. 50mm units supplied with a square edge as standard.



35mm: Chamfer / Bevelled



50mm: Square / Straight

ADVICE + GUIDANCE

For advice and guidance on ordering, installation, good site practice, etc. visit our website:
www.ag.uk.com/advice+guidance

For maintenance guidance and health and safety advice visit our website:
www.ag.uk.com/maintenance

AG RECOMMENDATIONS

Close Jointing

AG recommends a close joint of between 2mm - 5mm as per BS 7533 to cater for product alignment (butt jointing should be avoided).

Jointing Sand

AG recommends that silver and slate coloured products are jointed with AG's Granite Sand.

Colour blending

AG recommends that products are blended from 3 packs from alternate sides using full vertical sections.

Please contact our Technical Specification Department for further details.


FINISH

Common flags are hydraulically pressed (wet cast), ensuring a durable surface with a dimpled or smooth finish.

COLOURS / FINISHES



GREY
(DIMPLED)



GREY
(SMOOTH)

SPECIFICATION REFERENCE: NBS PLUS: Q25 SLAB/BRICK/SETT/COBBLE PAVINGS: 31, 315; hEN: 1339:2003

MANUFACTURING

Common flags are manufactured from graded aggregates from locally sourced materials. PLANT OF MANUFACTURE: Made at our Carryduff production plant.

CERTIFICATION


ISO 9001
ISO 14001
ISO 45001
CE Marking

Quality Management.
Environmental Management.
Occupational Health and Safety Management.
Download our Declaration of Performance (DOP) data at: www.ag.uk.com/resources



Common flags

functional flagstones with a dimpled or smooth finish

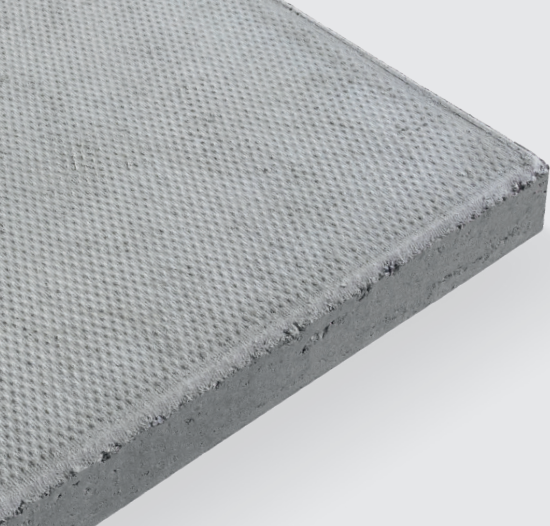


DEPTHS



35 | 50
Millimetres

FINISH

Dim Sm
Dimpled Smooth

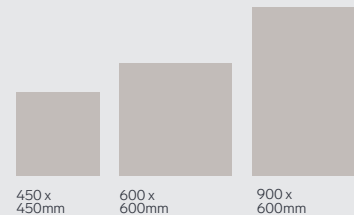

Common flags
stock information

STOCK INFORMATION

Standard product depth	Size (mm)	Size (ft)	In Stock	Available Colours / Finishes	m ² per pack	Units per m ²	Units per pack	Unit weight (kg)	Weight per pack (t)	Packs per 8 wheeler*	Packs per unit lorry*
35mm	450 x 450	1.5 x 1.5	Yes	Grey (Smooth)	6.075	4.94	30	15.5	0.465	32	52
50mm	600 x 600	2 x 2	Yes	Grey (Dimpled)	7.2	2.78	20	45.5	0.94	20	30
	900 x 600	3 x 2	Yes	Grey (Dimpled)	10.8	1.85	20	66.7	1.3	14	20
Cut flags 50mm	300 x 300	1 x 1	MTO	Grey (Dimpled)	1.8	11.1	20	11	0.22	N/A	N/A
	450 x 600	1.5 x 2	MTO	Grey (Dimpled)	5.4	3.7	20	33.3	0.65	N/A	N/A

MTO: Made To Order (minimum order quantities: 250m² per colour / size. Orders below these quantities should be priced on application).

35mm has a chamfer edge. 50mm has a straight edge.

Cut flags are bought individually as required. Cut flags are not supplied on pallets.

* 15,000kg nett load / 25,000kg nett load - NB. May vary depending on lorry tare.



Frost Resistant



Pedestrian Use